


reliable. secure. simple.

rhynotel

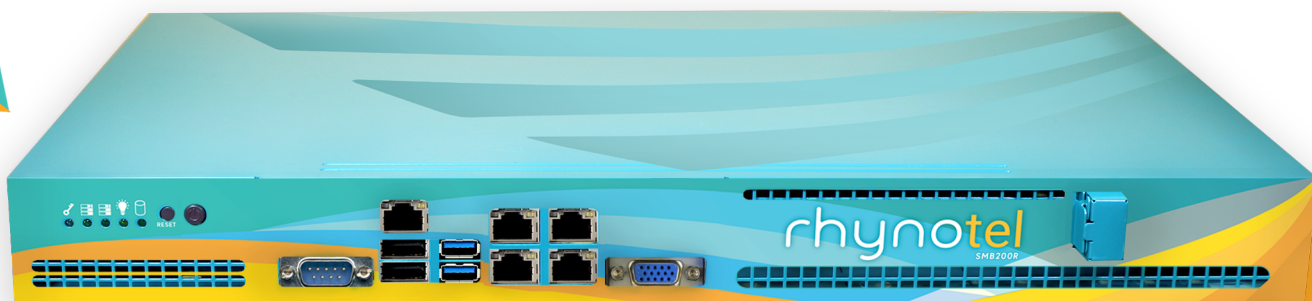

# 200R

up to  
**200**  
users

**Rhynotel's 200R** on-premise PBX delivers exceptional, powerful communications for mid-sized enterprise businesses.

Built for branch offices, mid-sized enterprises, and expanding businesses looking to leverage VoIP technology to enhance employee collaboration, the **200R** provides efficiency and cost-savings. No worrying about heat and power consumption as it operates at a whisper and is tailored to use consume minimum energy while working at maximum power.

Equipped with a robust amount of customizable features, the **200R** supports up to 200 Phones and 100 concurrent calls. Rhynotel engineers the **200R** to be the most flexible PBX available, seamlessly blending in to any kind of office environment.



Supports up to 200 users & up to 100 concurrent calls



Wide range of standard features included at no additional cost



Call recording capabilities with built-in server, which can be accessed through Rhynotel's web-based call management \*



Helpdesk agents available remotely and on-site to solve any concerns \*



Auto-attendant feature brings customization for your incoming calls



Supports calling queues to maximize efficiency in volume management \*



Sleek stand alone units for all environments



Quiet operation to fit in most server environments



Highest-possible security protection through SRTP, TLS and HTTPS Encryption



Easy & seamless phone system implementation



For business professionals who find themselves out of the office, but need to stay connected at all times of the day




Automatically receive a copy of your voicemails to your email inbox

\* additional cost may apply

888.661.6068

rhynotel

www.rhynotel.com

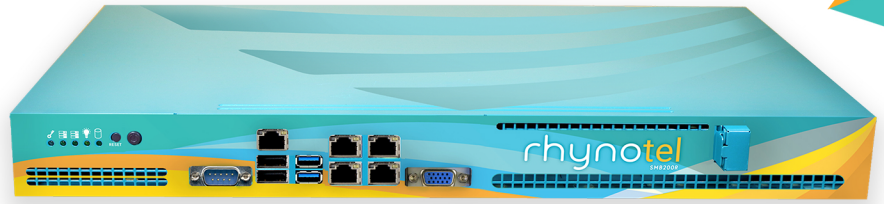

Model:	Milo	Milo+	200R	350R	Custom
Maximum Capacity:	1 - 25	100	200	350	350+
<b>Interfaces Specifications</b>					
Analog FXS Ports:	N/A	N/A	0 - 4	0 - 4	0 - 4
PSTN FXO Ports:	N/A	N/A	0 - 4	0 - 4	0 - 4
Network Interface:	2	2	4	1 - 4	1 - 4
LED	Power Only	Power Only	Power	Power	Power
			Network	Network	Network
			HDD	HDD	HDD

Voice Specifications	* Requires supported provider and phones / Possible licensing					Support
PCMU "ulaw"	X	X	X	X	X	
PCMA "alaw"	X	X	X	X	X	
G729	X	X	X	X	X	
G726	X	X	X	X	X	
G723	X	X	X	X	X	
G722	X	X	X	X	X	
iLBC	X	X	X	X	X	
GSM	X	X	X	X	X	

<b>Physical Requirements</b>						
Dimensions (WxDxH):	200x210x75mm	200x210x75mm	437x249x42mm	437x249x43mm	437x249x43mm	TBD
Operating Temperature:	10°C to 35°C (50°F to 95°F) ALL					TBD
Operating Relative Humidity:	8% to 90% (non-condensing) ALL					
Power Supply Specifications:	95W	95W	200W	200W	200W	TBD
Security Features:	Autoblocks failed access attempts (Fail2ban)					TBD

<b>Features List:</b>		
Voicemail to Email	Fax to Email *	Failover Devices *
Auto Attendant (IVR)	Wake up Calls	Call History
Hunt / Ring Groups	Directory & Dictation	Call Recording
Built in Conference Bridge/Service	Caller ID *	Overhead Paging *
Follow Me / Find Me Calling	Music on hold *	Voicemail
Flexible Time-based Call Routing	Call Paging	Unified Communications *
Calling Queues	DISA	Call Forwarding
Customizable Announcements	Soft Phone *	Speed Dials
Caller Blacklisting	Three way calling	Call Screening
Operator Panel *	Do not disturb	

\* additional cost may apply