

reliable. secure. simple. **rhynotel**



up to

100

users

MILO+

Say HELLO to MILO+, Rhynotel's innovative on-premise solution for growing small to medium business. By utilizing VOIP technology, SMBs benefit from increased productivity and significant cost savings. The dynamic strength of MILO+ offers secure, reliable VOIP telephony with custom features, flexible service plans, and cost efficient price points. As your business grows, MILO+ grows along with you.

The standalone design of MILO+ seamlessly integrates into any office environment. The minimal, modern chassis can be displayed prominently in your office lobby or mounted discreetly on a break room wall.



Supports up to 100 users & up to 55 concurrent calls



Wide range of standard features included at no additional cost



Call recording capabilities with built-in server, which can be accessed through Rhynotel's web-based call management *



Helpdesk agents available remotely and on-site to solve any concerns *



Auto-attendant feature brings customization to your incoming calls



Supports calling queues to maximize efficiency in volume management *



No silent configuration needed as Rhynotel will come pre-configured *



Quiet operation to fit in most server environments



Highest-possible security protection through SRTP, TLS and HTTPS Encryption



Easy & seamless phone system implementation



Gigabit-powered Ethernet connection ports with built-in PoE




Automatically receive a copy of your voicemails to your email inbox

* additional cost may apply

888.661.6068

rhynotel

www.rhynotel.com

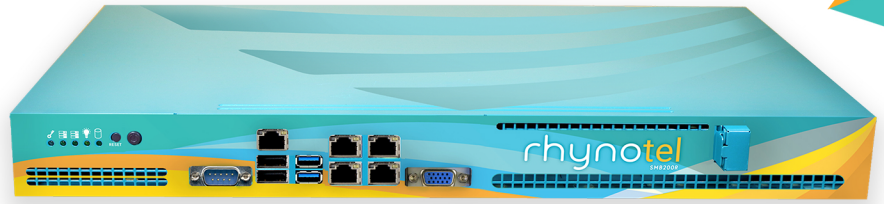

Model:	Milo	Milo+	200R	350R	Custom
Maximum Capacity:	1 - 25	100	200	350	350+
Interfaces Specifications					
Analog FXS Ports:	N/A	N/A	0 - 4	0 - 4	0 - 4
PSTN FXO Ports:	N/A	N/A	0 - 4	0 - 4	0 - 4
Network Interface:	2	2	4	1 - 4	1 - 4
LED	Power Only	Power Only	Power	Power	Power
			Network	Network	Network
			HDD	HDD	HDD

Voice Specifications	* Requires supported provider and phones / Possible licensing					Support
PCMU "ulaw"	X	X	X	X	X	
PCMA "alaw"	X	X	X	X	X	
G729	X	X	X	X	X	
G726	X	X	X	X	X	
G723	X	X	X	X	X	
G722	X	X	X	X	X	
iLBC	X	X	X	X	X	
GSM	X	X	X	X	X	

Physical Requirements						
Dimensions (WxDxH):	200x210x75mm	200x210x75mm	437x249x42mm	437x249x43mm	437x249x43mm	TBD
Operating Temperature:	10°C to 35°C (50°F to 95°F) ALL					TBD
Operating Relative Humidity:	8% to 90% (non-condensing) ALL					
Power Supply Specifications:	95W	95W	200W	200W	200W	TBD
Security Features:	Autoblocks failed access attempts (Fail2ban)					TBD

Features List:		
Voicemail to Email	Fax to Email *	Failover Devices *
Auto Attendant (IVR)	Wake up Calls	Call History
Hunt / Ring Groups	Directory & Dictation	Call Recording
Built in Conference Bridge/Service	Caller ID *	Overhead Paging *
Follow Me / Find Me Calling	Music on hold *	Voicemail
Flexible Time-based Call Routing	Call Paging	Unified Communications *
Calling Queues	DISA	Call Forwarding
Customizable Announcements	Soft Phone *	Speed Dials
Caller Blacklisting	Three way calling	Call Screening
Operator Panel *	Do not disturb	

* additional cost may apply