

reliable. secure. simple. rhynotel



up to
25
users

MILO

Say **HELLO** to **MILO**, Rhynotel's smallest breakthrough on-premises solution for Small Business Telephony. Built for Small Businesses looking to leverage VOIP technology for workflow efficiency and cost savings, **MILO** is the ultimate solution for stable small businesses, branch offices, or startups needing enterprise level features in a small sleek form factor.

MILO's unibody aluminum chassis was designed and built with the Small Business in mind. It's minimal modern design and small footprint let it integrate seamlessly into any office environment. Whether mounted covertly on the breakroom wall to being displayed prominently in the office lobby.



Supports up to 25 users & up to 12 concurrent calls



Wide range of standard features included at no additional cost



Call recording capabilities with built-in server, which can be accessed through Rhynotel's web-based call management *



Helpdesk agents available remotely and on-site to solve any concerns *



Auto-attendant feature brings customization for your incoming calls



Supports calling queues to maximize efficiency in volume management *



No client configuration needed as Rhynotel will come pre-configured *



Quiet operation to fit in most server environments



Highest-possible security protection through SRTP, TLS and HTTPS Encryption



Easy & seamless phone system implementation



Gigabit-powered Ethernet connection ports with built-in PoE




Automatically receive a copy of your voicemails to your email inbox

* additional cost may apply

888.661.6068

rhynotel

www.rhynotel.com

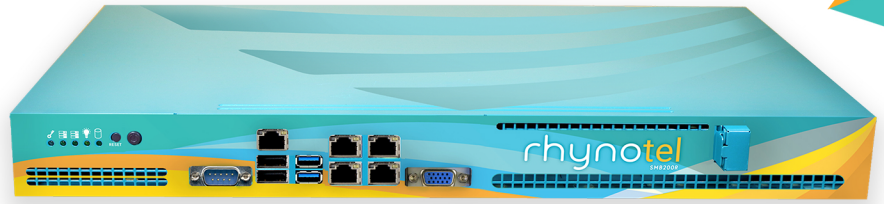

Model:	Milo	Milo+	200R	350R	Custom
Maximum Capacity:	1 - 25	100	200	350	350+
Interfaces Specifications					
Analog FXS Ports:	N/A	N/A	0 - 4	0 - 4	0 - 4
PSTN FXO Ports:	N/A	N/A	0 - 4	0 - 4	0 - 4
Network Interface:	2	2	4	1 - 4	1 - 4
LED	Power Only	Power Only	Power	Power	Power
			Network	Network	Network
			HDD	HDD	HDD

Voice Specifications	* Requires supported provider and phones / Possible licensing					Support
PCMU "ulaw"	X	X	X	X	X	
PCMA "alaw"	X	X	X	X	X	
G729	X	X	X	X	X	
G726	X	X	X	X	X	
G723	X	X	X	X	X	
G722	X	X	X	X	X	
iLBC	X	X	X	X	X	
GSM	X	X	X	X	X	

Physical Requirements						
Dimensions (WxDxH):	200x210x75mm	200x210x75mm	437x249x42mm	437x249x43mm	437x249x43mm	TBD
Operating Temperature:	10°C to 35°C (50°F to 95°F) ALL					TBD
Operating Relative Humidity:	8% to 90% (non-condensing) ALL					
Power Supply Specifications:	95W	95W	200W	200W	200W	TBD
Security Features:	Autoblocks failed access attempts (Fail2ban)					TBD

Features List:		
Voicemail to Email	Fax to Email *	Failover Devices *
Auto Attendant (IVR)	Wake up Calls	Call History
Hunt / Ring Groups	Directory & Dictation	Call Recording
Built in Conference Bridge/Service	Caller ID *	Overhead Paging *
Follow Me / Find Me Calling	Music on hold *	Voicemail
Flexible Time-based Call Routing	Call Paging	Unified Communications *
Calling Queues	DISA	Call Forwarding
Customizable Announcements	Soft Phone *	Speed Dials
Caller Blacklisting	Three way calling	Call Screening
Operator Panel *	Do not disturb	

* additional cost may apply